




Pre-install

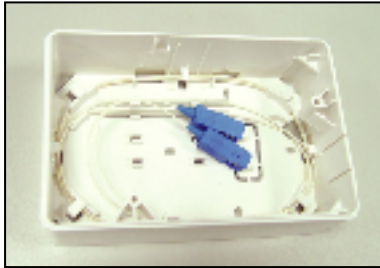


1. Install cable in wallbox: Splice fiber cable according to the single mode or multi-mode.

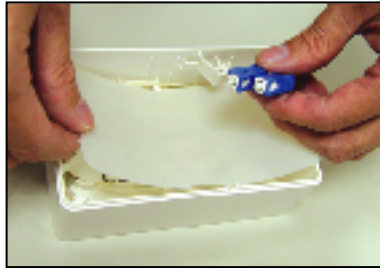


2. Hold the fiber connector and insert the cable separator under the connector.

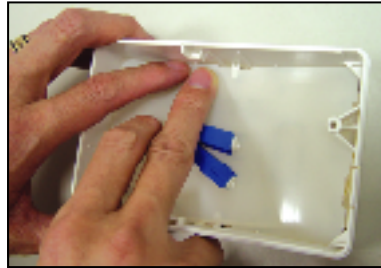

3. Push separator down and snap on the knobs.

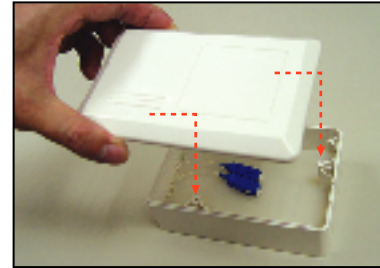

4. Align the knobs on faceplate right edge and lower left edge into the holes on wallbox.

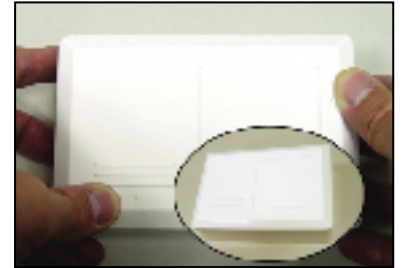


5. Push two knobs right edge and lower left edge to clip the wallbox. Now you complete the blank wallbox installation.


Converter install




1. Top entry 10/100M Converter module.

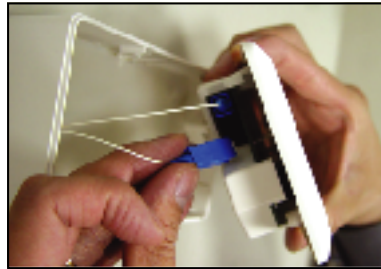

3. Select appropriate Converter module and assembly the fiber connector.

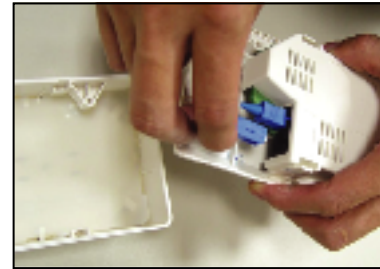

4. Another view of Fiber connector assembly.

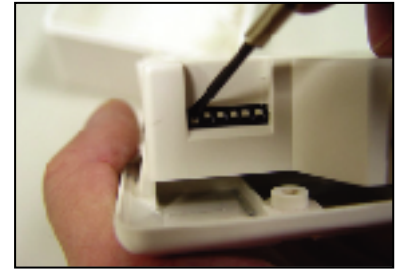

5. Select appropriate link mode from dip switch. Factory setup #1-5 is all on.

2.

Vent holes

Fiber type1: SC connector
Fiber type2: MT-RJ connector

Label 3: Fiber white / blue

Label 1: MM/SM15/SM30/SM60

Label2: Serial number

Piano Dip Switch

#1 Auto-negotiation enable/disable
#2 UTP speed 10Mbps/100Mbps
#3 UTP Full Duplex/Half Duplex
#4 FX Full Duplex/Half Duplex
#5 Link loss forwarding enable/disable



6. Assembly the module with the wallbox.



7. Screw the converter module.



8. Use power adapter 5Vdc to power on, and connect the patch cord with RJ45 modular port.